




S4A Industrial Co., Limited




S-X Series

Convertible Access Controller / Reader



S1-X



S2-X

INTRODUCTION

The S-X Series (S1/2/3-X) is a single door multifunction standalone access controller or a Wiegand output reader. It uses Atmel MCU assuring stable performance, packed with small Infrared Remote Control, the operation is very user-friendly. low-power circuit makes it long service life.

The S1/2/3-X supports 1,000 users (998 common users + 2 panic users), all user data can be transferred from one to another (Max 10pcs). It supports multi access modes in either card access, PIN access (Use PIN on the Infrared Remote Control), Card + PIN access, or multi cards/PINs access. It has extra features including block enrollment, interlocked, Wiegand 26~37 bits interface...etc.

Features


- > Waterproof, conforms to IP66
- > One relay, remote infrared programmer
- > 1,000 users (998 common users + 2 panic users)
- > User data can be transferred
- > Can be set to read EM card, HID card, or both
- > Wiegand 26~37 bits input & output
- > Can be used as Wiegand reader with LED & Buzzer output
- > Card block enrolment
- > Tri-colour LED status display
- > Integrated alarm & buzzer output
- > Pulse mode, Toggle mode
- > Can add and use 4~6 digits PIN on Infrared Remote Control
- > 2 devices can be interlocked for 2 doors
- > Built in light dependent resistor (LDR) for anti tamper
- > Low temperature resistance(-40°C)


Specifications

User Capacity Common User Panic User	1000 998 2
Operating Voltage Idle Current	12~18V DC <35mA
Proximity Card Reader Radio Technology Read Range	EM&HID 125KHz Proximity Card 2~6 cm

Wiring Connections	Relay Output, Exit Button
Relay Adjustable Relay Output Time Lock Output Load	One (NO, NC, Common) 1~99 Seconds (5 seconds default) 2 Amp Maximum
Environment Operating Temperature Operating Humidity	Meets IP66 -40°C ~ 60°C (-40°F ~ 140°F) 0~98%RH
Physical Colour Dimensions	ABS Shell Black (White optional) L103mm × W48mm × D20mm (S1/2-X) L120mm × W48mm × D20mm (S3-X)
Unit Weight Shipping Weight	125g (S1/2-X) 150g (S3-X) 185g (S1/2-X) 220g (S3-X)


Carton Inventory

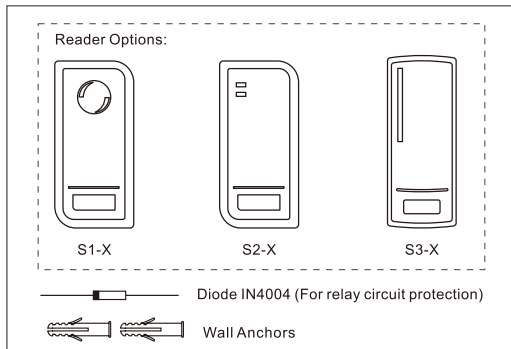

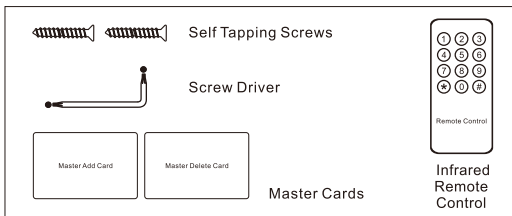

INSTALLATION

- > Remove the back cover from the unit
- > Drill 2 holes(A,C) on the wall for the screws and one hole for the cable
- > Knock the supplied rubber bungs to the screw holes(A,C)
- > Fix the back cover firmly on the wall with 4 flat head screws
- > Thread the cable through the cable hole(B)
- > Attach the unit to the back cover



Wiring

Wire Color	Function	Notes
Basic Standalone Wiring		
Red	+ DC	12-18V DC Power Input
Black	GND	Negative Pole of DC Power Input
Blue	Relay NO	Normally Open Relay Output (install diode provided)
Purple	Relay Common	Common Connection for Relay Output
Orange	Relay NC	Normally Closed Relay Output (Install diode provided)
Yellow	OPEN	Request to Exit(REX) Input
Pass-Through Wiring (Wiegand or Controller)		
Green	Data 0	Wiegand Output (Pass-through) Data 0
White	Data 1	Wiegand Output (Pass-through) Data 1
Advanced Input and Output Features		
Grey	Alarm Output	Negative contact for Alarm
Brown	Contact Input	Door/Gate Contact Input (Normally Closed)

Sound and Light Indication

Operation Status	LED	Buzzer
Stand by	Red light bright	—
Enter into programming mode	Red light shines	One beep
In the programming mode	Orange light bright	One beep
Operation error	—	Three beeps
Exit from the programming mode	Red light bright	One beep
Open lock	Green light bright	One beep
Alarm	Red light Shines quickly	Beeps

Basic Configure

Please use the Infrared Remote Control to program the Reader. The infrared receiver head is near LED, so when program the reader, it is suggested to direct the Remote Control to the LED.

Enter and Exit Program mode

Programming Step	Keystroke Combination
Enter Program Mode	* (Master Code) # (Factory default is 123456)
Exit Program Mode	*

Set Master Code

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Update Master Code	0 (New Master Code) # (Repeat New Master Code) # (Master code is any 6 digits)
3. Exit Program Mode	*

Set the Working Mode


Notes: the S1/2/3-X has 3 working modes: Standalone Mode, Controller Mode, Wiegand Reader Mode, choose the mode you use. (Factory default is Standalone Mode / Controller Mode)

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Standalone/Controller Mode OR 2. Wiegand Reader Mode	7 2 # (Factory default) 7 3 #
3. Exit	*

STANDALONE MODE

S1/2/3-X can be worked as Standalone Reader for single door. (Factory default mode)---7 2 #

Connection Diagram

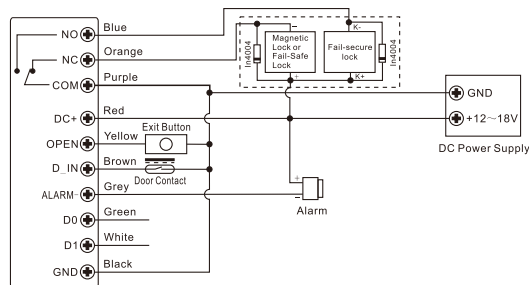


S1/2/3-X

Attention:

Install a 1N4004 or equivalent diode is needed when use a common power supply, or the reader might be damaged. (1N4004 is included in the packing)

Access Control Power Supply:

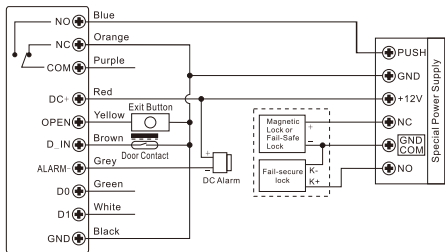

S1/2/3-X

Programming by Infrared Remote Control

Programming will vary depending on access configuration. Follow the instructions according to your access configuration.

Notes:

- > User ID number: Assign a user ID to the access card in order to track it. The common user ID number can be any number from 0-997, the panic user ID is from 998-999. **IMPORTANT:** User IDs do not have to be preceded with any leading zeros. Recording of User ID is critical. Modifications to the user require the User ID be available.
- > Proximity Card: Any 125KHz industry standard 26 bit EM and HID Proximity card or Tag.
- > PIN: Can be any 4-6 digits except 8888 which is reserved. Press PIN on the Infrared Remote Control.

Add Common Users

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #

Add Card User

2. Add Card: Using Auto ID (Allows S1/2/3-X to assign Card to next available User ID number)
OR
2. Add Card: Select Specific ID (Allows Master to define a specific User ID to associate the card to)
OR
2. Add Card: by Card Number
OR
2. Add Card: Block Enrolment (Allows Master to add up to 998 cards to the Reader in a single step.)
Takes 2 minutes to program.

- 1 (Read Card) #**
The cards can be added continuously.
- 1 (User ID) # (Read Card) #**
(User ID is any number from 0-997)
- 1 (Input 8/10 digits Card number) #**
- 1 (User ID) # (Card quantity) # (The first card number) #**
Cards' number must be consecutive;
Card quantity = number of cards to be enrolled.

Add PIN User

2. Add PIN: Using Auto ID (Allows S1/2/3-X to assign PIN to next available User ID number)
2. Add PIN: Select Specific ID (Allows manager to define a specific User ID to associate the PIN to)
3. Exit

- 1 (PIN) #**
The PINs can be added continuously.
(PIN: 4-6digits)
- 1 (User ID) # (PIN) #**
The user ID is any number from 0-997.
- ***

Add Panic Users

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Add Card: OR 2. Add PIN:	1 (User ID) # (Read Card / Input 8/10 digits Card number) # 1 (User ID) # (PIN) # (User ID is any number from 998-999)
3. Exit	*

Change PIN Users

Programming Step	Keystroke Combination
Note: Below is done outside programming mode, users can undertake this themselves	
2. Change PIN: By Card (There will auto allocate PIN (8888) to cards when adding)	* (Read Card) (Old PIN) # (New PIN) # (Repeat New PIN) #
2. Change PIN: By PIN	* (User ID) # (Old PIN) # (New PIN) # (Repeat New PIN) #
3. Exit	*

Delete Users

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
Delete Card User - Common	
2. Delete Card By Card OR 2. Delete Card – By ID number OR 2. Delete User – By Card number	2 (Read Card) # The cards can be deleted continuously. 2 (User ID) # 2 (Input 8/10 digits Card number) #
Delete PIN User - Common	
2. Delete PIN – by PIN OR 2. Delete PIN – By ID number	2 (Input PIN) # 2 (User ID) #
Delete Panic User	
2. Delete Panic Card User OR 2. Delete Panic PIN User	2 (User ID) # 2 (User ID) #
Delete All Users	
Delete All User	2 (Master Code) #
3. Exit	*

Set Relay Configuration

The relay configuration sets the behaviour of the output relay on activation.

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Pulse Mode OR 2. Toggle Mode	3 (1-99) # (Factory default) The relay time is 1-99 seconds. (1 is 50mS.) (Default is 5 seconds) 3 0 # Sets the relay to ON/OFF Toggle mode
3. Exit	*

Set Access Mode

For Multi cards/PINs access mode, the interval time of pressing cards/inputting PINs can not exceed 5S, or else, the machine will exit to standby automatically.

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Card access OR 2. Card + PIN access OR 2. Card or PIN access OR 2. Multi cards/PINs access	4 0 # 4 1 # 4 2 # (Factory default) 4 3 (2~9) #
3. Exit	*

Set Strike-out Alarm

The strike-out alarm will engage after 10 failed card attempts (Factory is OFF). It can be set to deny access for 10 minutes after engaging or disengage only after entering a valid card/PIN or Master code.

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #

2. Strike-Out OFF OR 2. Strike-Out ON OR 2. Strike-Out ON (Alarm) Set alarm time	6 0 # (Factory default) 6 1 # Access will be denied for 10 minutes 6 2 # 5 (0 ~ 30) # (Factory default is 1 minute) Enter Master code # or valid user card /PIN to silence
3. Exit	*

Set Audible and Visual Response

Programming Step	Keystroke Combination	
1. Enter Program Mode	* (Master Code) #	
2. Control Sounds OR 2. Control LED	OFF = 7 0 # OFF = 7 4 #	ON = 7 1 # ON = 7 5 # (Factory defaults are ON)
3. Exit	*	

Set Card Reading Type

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Read EM & HID card OR 2. Read EM card ONLY OR 2. Read HID card ONLY	9 3 # (Factory default) 9 4 # 9 5 #
3. Exit	*

Master Cards Usage

Using Master Card to add and delete card users

Add a Card User	1. (Read Master Add Card) 2. (Read User Card) Repeat Step 2 for additional user cards 3. (Read Master Add Card)
Delete a Card User	1. (Read Master Delete Card) 2. (Read User Card) Repeat Step 2 for additional user cards 3. (Read Master Delete Card)

Users Operation & Reset to Factory Default

- > **Open the door:** Read the valid user card/ Input the valid PIN on the Infrared Remote Control, the door will open.
- > **Remove Alarm:** Read valid user card/ Input the valid PIN on the Infrared Remote Control, or Input Master Code #
- > **To reset to Factory default,** power off, press the Exit Button, hold it and power on, there will be two beeps, and the LED light turns into orange, release the exit button, then read any two 125KHz EM card or HID card, the LED will turn into red, means reset to Factory default successfully. Of the two cards reading, the 1st one is Master Add Card, the 2nd one is the Master Delete Card.

Remarks:


- ① If no Master Cards added, must press the Exit Button for at least 10 seconds before release
- ② Reset to Factory default, the user's information is still retained.

CONTROLLER MODE

S1/2/3-X can work as Controller, connected with the external Wiegand reader. (Factory default mode)---7 2 #

Connection Diagram

Attention: Install a 1N4004 or equivalent diode is needed when use a common power supply, or the reader might be damaged. (1N4004 is included in the packing)



Set Wiegand Input Formats

Please set the Wiegand input formats according to the Wiegand output format of the external Reader.

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Wiegand input bits	8 (26~37) # (Factory default is 26bits)
3. Exit	*

Programming

> Basic Programming is the same as Standalone Mode

> There are some exceptions for your attention

S1/2/3-X Connected with External Card Reader:

> If EM card reader or HID card reader: users can be added/deleted on either S1/2/3-X or external reader

> If Mifare reader: users can only be added/deleted on external reader

S1/2/3-X Connected with Fingerprint Reader:

For example:

Connect F1 as the fingerprint reader to S1/2/3-X, it is of two steps to enroll the valid fingerprint.

Step 1: Add the Fingerprint (A) on F1

Step 2: Add the same Fingerprint(A) on S1/2/3-X:

1	Enter Program Mode: * (Master Code) #
2	1 (Press Fingerprint A on F1) (Repeat Fingerprint A on F1) # (ID auto allocated)
OR	
2	1 (User ID) # (Press Fingerprint A on F1) (Repeat Fingerprint A on F1) # (Select specific ID)
3	Exit: *

S1/2/3-X Connected with Keypad Reader:

The keypad reader can be 4 Bits, 8 Bits (ASCII), or 10 Bits output format

Choose below operation according to the PIN output format of your reader

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #

2. PIN Input format	8 (4 or 8 or 10) # (Factory default is 4 bits)
3. Exit	*

Remarks: 4 means 4 bits, 8 means 8 bits, 10 means 10 digits virtual number.

> Add PIN Users:

To add PIN users, after entering into the program mode by Infrared remote control, PIN(s) can be input/added on either Infrared remote control or the external Keypad Reader, except when the Keypad Reader is 10Bits virtual card number output, the PIN(s) can only be input/added through the Keypad Reader.

> Delete PIN Users: the same way as add users.


WIEGAND READER MODE

S1/2/3-X can work as Standard Wiegand Reader, connected to the third party Controller--- 7 3 #

Notes:

The reader can be set to read EM & HID card, or EM card only, or HID card only. Factory default card type is EM & HID card, if you want to change the type, please set the device to Standalone Mode (7 2 #) and then set the type. (Reference page 11 for setting card type)

Connection Diagram

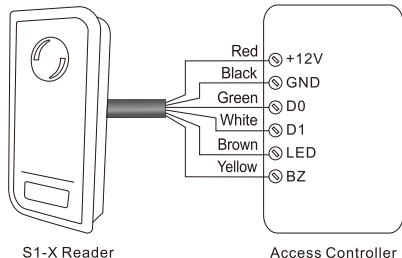

Notes:

- > When set into Wiegand Reader mode, nearly all settings in Controller Model will become invalid. And Brown & Yellow wires will be redefined as below:
 - Brown wire: Green LED light control
 - Yellow wire: Buzzer control
- > If you need to connect Brown/Yellow wires:
 - When the input voltage for LED is low, the LED will turn into Green; and when the input voltage for Buzzer is low, it will sound.

Set Wiegand Output Formats

Please set the Wiegand output formats of Reader according to the Wiegand input formats of the Controller.


Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Wiegand output bits	8 (26~37) # (Factory default is 26bits)
3. Exit	*

ADVANCE APPLICATION

User Information Transfer

The S1/2/3-X supports the User Information Transfer function, and the enrolled user (cards, PINs) can be transferred from one (let's name it Master Unit) to another (let's name it Accept Unit). Maximum 10pcs Accepts Units can be transferred once.

Connection Diagram:

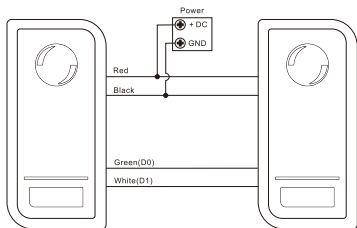

Remarks:

- > The Master Units and Accept Units must be S1/2/3-X or Board.
- > The Master Code of the Master Unit and the Accept Units(s) must be set to the same.
- > Program the transfer operation on Master Unit only
- > If the Accept Unit(s) are already with the users enrolled, it will be covered after transfer.
- > For full 1000 users enrolled, the transfer takes 3 minutes.


Set Transferring on Master Unit:

Programming Step	Keystroke Combination
1. Enter the programming mode	* (Master Code) #
2. Set transferring	9 6 #
Within 3 minutes, Green LED shines, after one beep, the LED will turn into Red, which means the users' information has been transferred successfully.	
3. Exit	*

Interlock

The S1/2/3-X supports the Interlock function. It is of two readers for two doors, and mainly used for banks, prisons, and other places where a higher level security is required.

Connection Diagram:

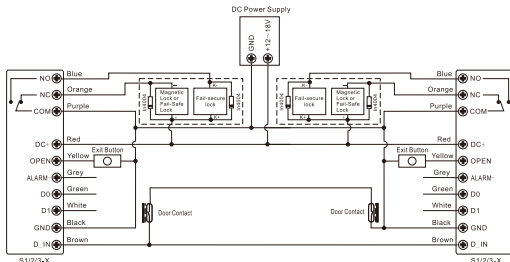

Remarks: The Door Contact must be installed and connected as the diagram.

Let's name the two readers A and B for two doors 1 and 2

Step 1:

Enroll the users on Reader A, then transfer the users' information to Reader B by "User Information Transfer" function.

Step 2:

Set both of the two readers (A and B) to Interlock function

Programming Step	Keystroke Combination
1. Enter Program Mode	* (Master Code) #
2. Interlocked-OFF OR 2. Interlocked-ON	9 0 # (Factory default) 9 1 #
3. Exit	*

The interlock operation is finished.

When and only door 2 is closed, the user can read the valid card (or input PIN) on Reader A, door 1 will open; then when and only door 1 closed, read valid card (or input PIN) on Reader B, door 2 will open.