



Double door 180KG  
Electromagnetic lock




EL-350D, EL-350DS, EL-350DST


Specifications

|                       |   |  |
|-----------------------|---|--|
| EL-350D               | Without Signal Output                               |  |
| EL-350DS              | With LED (Red only)                                 |   |
| EL-350DST             | LED, door sensor and time delay                     |    |
| Lock Size             | 340Lx41.4Wx20.5H(mm)                                |  |
| Armature Plate        | 130Lx33Wx9.3H(mm)                                   |  |
| Holding Force         | 180kgx2 (350Lbsx2)                                  |  |
| Input Voltage         | 12V/300mAx2 24V/150mAx2                             |  |
| Current Draw          | 12V/300mAx2 24V/150mAx2                             |  |
| Suitable for          | Wooden door, Glass door, Metal door, Fireproof door |  |
| Signal Output         | Need to order EL-D350S                              |  |
| Surface Temp          | ≤20°C   |  |
| Operating Temp        | -10°C ~ 55°C (14°F~131°F)                           |  |
| Suitable Humidity     | 0~90%(non-condensing)                               |  |
| Finishes for Shell    | Anodized aluminum                                   |  |
| Finishes for Magnetic | Zinc  |  |
| Finishes for Armature | Zinc  |  |
| Weight                | 2.4kg   |  |
| Standard Packing      | 6pcs  |  |

# Dimensions

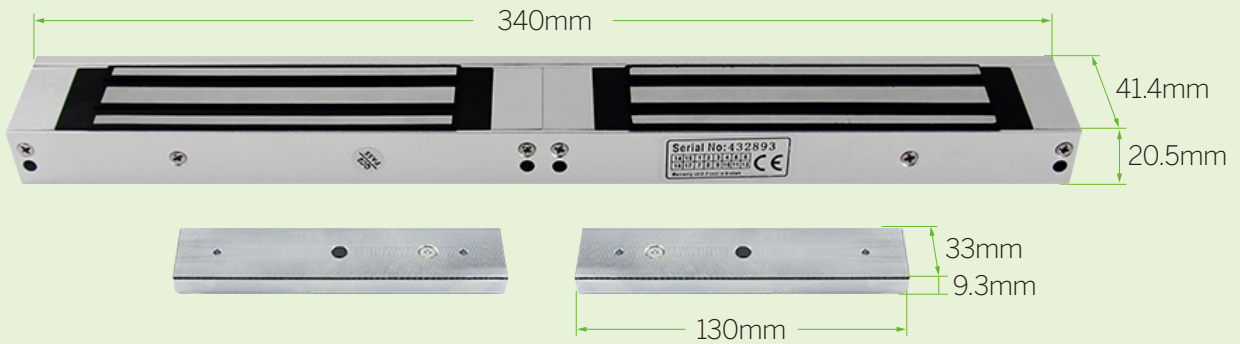

# Wiring diagram

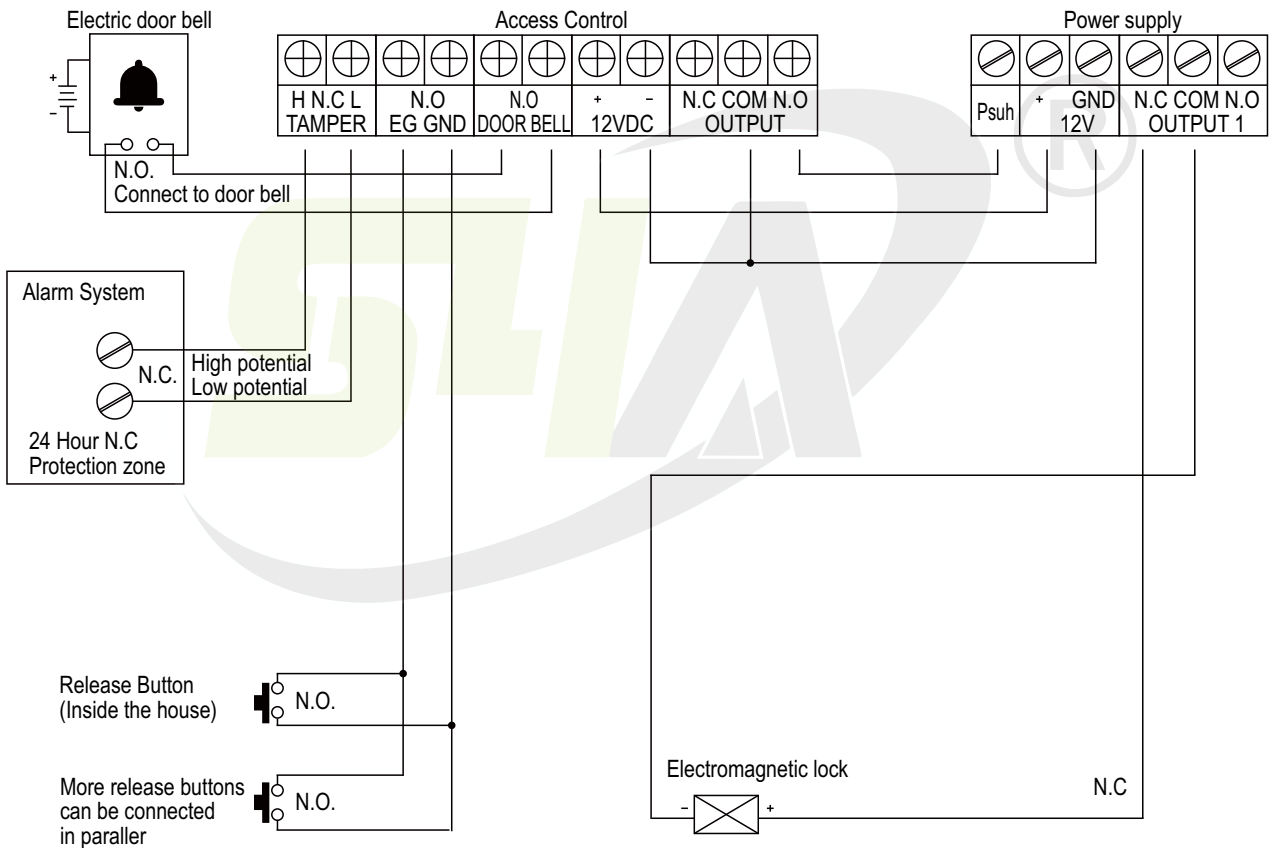

S4A Industrial Co., Limited

Address: The 2nd floor, Jinmin'an Industrial Zone, #529, Bulong Rd.  
Bantian St. Longgang Dist. Shenzhen, PRC.. CN 518131



Tel: +86 755 29450011

www.s4a-access.com / Email: sales@s4a-access.com  
Mob/Whatsapp/Wechat/Viber: +86 134 1050 0721