


Single door 180KG
Electromagnetic lock

EL-350, EL-350ST


Specifications

| | |
|-----------------------|--|
| EL-350 | Without Signal Output |
| EL-350ST | With Signal Output  |
| Lock Size | 170Lx41.5Wx20.5H(mm) |
| Armature plate | 130Lx33Wx9.3H(mm) |
| Holding Force | 180KG(350Lbs) |
| Voltage | DC12V or DC24V (24V need to customize) |
| Current Draw | 12V/280mA 24V/150mA |
| Signal Output | Pls see EL-350TS |
| Suitable for | Wooden door, Glass door, Metal door, Fireproof door |
| Surface Temp | ≤20°C |
| Operating Temp | -10°C ~ 55°C (14°F~131°F) |
| Suitable Humidity | 0~90%(non-condensing) |
| Finishes for Shell | Anodized aluminum surface texture processing |
| Finishes for Magnetic | Zinc |
| Finishes for Armature | Zinc |
| Weight | 1.2kg |
| Standard Packing | 20pcs |

Dimensions

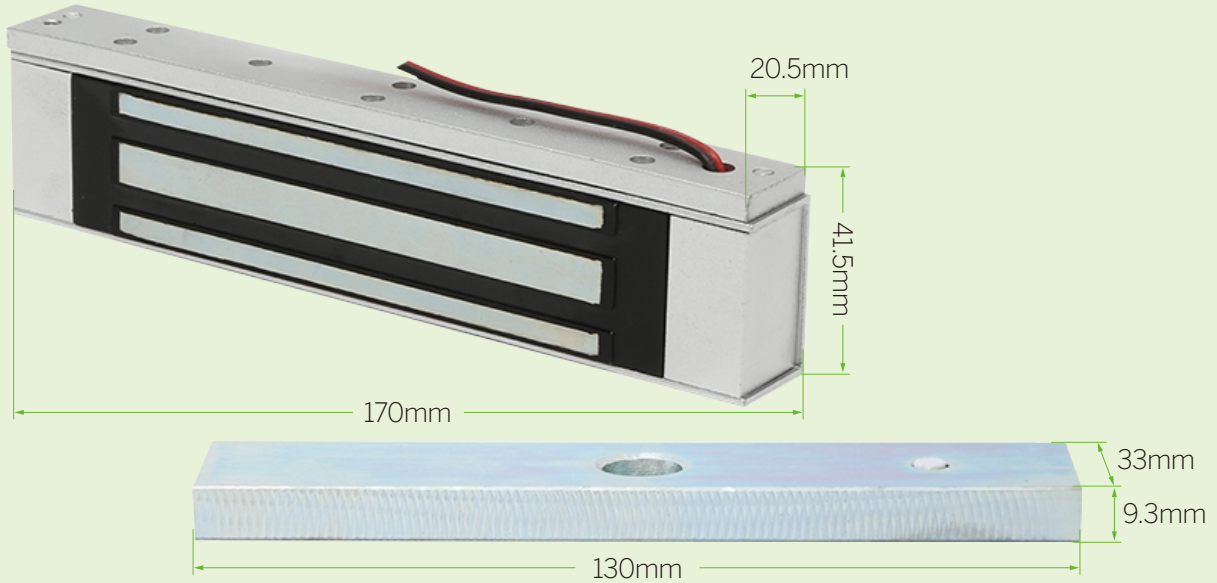

Wiring diagram

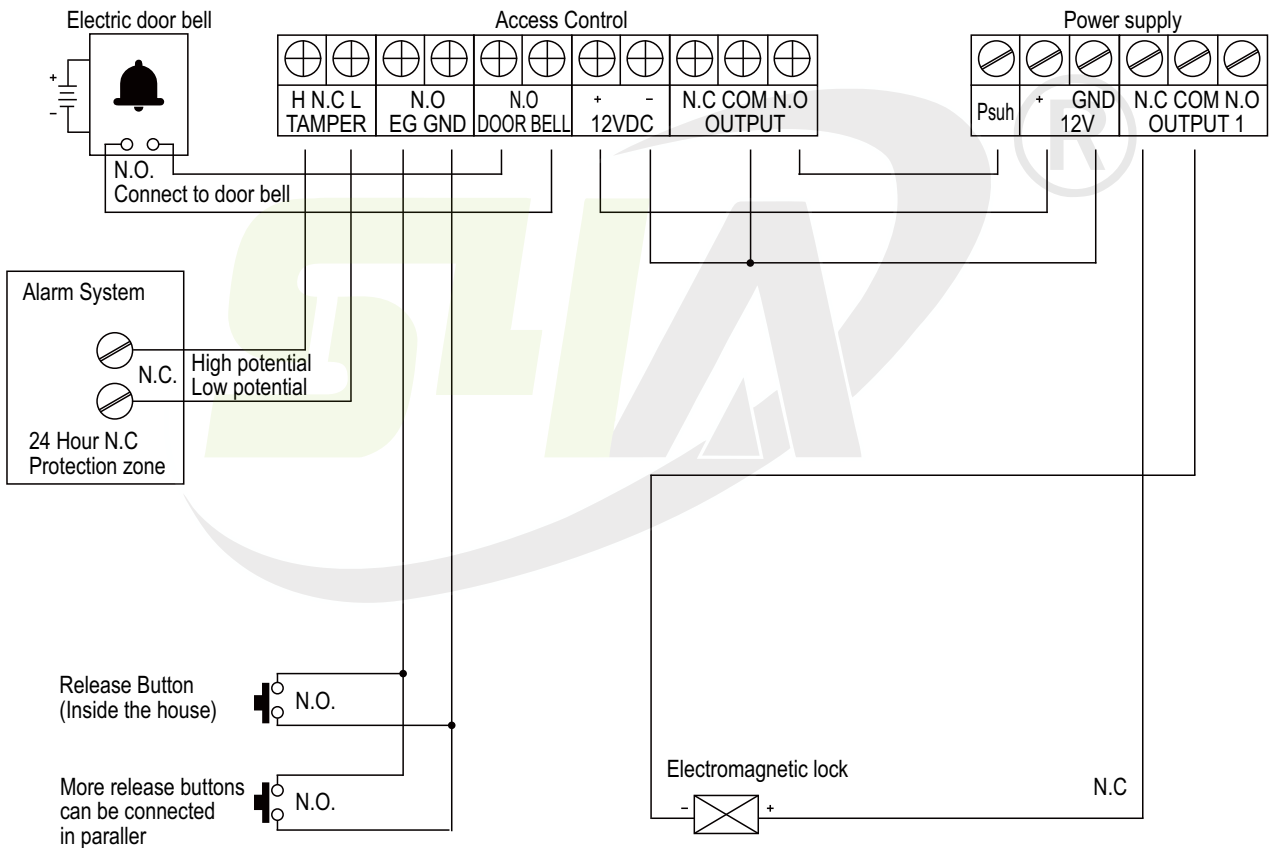

S4A Industrial Co., Limited

Address: The 2nd floor, Jinmin'an Industrial Zone, #529, Bulong Rd.
Bantian St. Longgang Dist. Shenzhen, PRC.. CN 518131



Tel: +86 755 29450011

www.s4a-access.com / Email: sales@s4a-access.com
Mob/Whatsapp/Wechat/Viber: +86 134 1050 0721